

CdTe Solar Cell of 15.8% Efficiency Developed

University of South Florida (USF) researchers have built a cadmium telluride solar cell that can convert 15.8% of the sunlight falling on it into electricity.

A 15% efficiency rating for CdTe represents a long-sought goal among photovoltaic researchers, a "magic number," according to USF electrical engineer Chris Ferekides. A measurement of 15.8% was "better than we expected," he said. Ferekides and fellow worker Jeff Britt have received official confirmation on the capability of their thin-film cell from the National Renewable Energy Laboratory, which provided test and analysis figures on the unit. Efficiency readings of up to 34% have been recorded for solar cells made of other materials, but their manufacturing costs are higher.

The USF cells could become cost-competitive with traditional methods of power production when mass-produced as large-area devices. The cell is produced by depositing a thin polycrystalline semiconductor film on an inexpensive substrate.

"The goal in solar energy is to bring the cost down," said Lee Stefanakos, chairman of USF's electrical engineering department. The breaking of the 15% barrier "really does bring us a lot closer to developing a cost-effective photovoltaic module that can compete with present utility rates," he said.

Internal Inspection of Hard Materials by MRI Investigated by Argonne, Bio-Imaging

A nine-month, \$100,000 project, undertaken jointly by Argonne National Laboratory and Bio-Imaging Research, Inc. (BIR), will seek to develop improved hardware to make magnetic resonance imaging (MRI) more useful to the ceramics, chemical, defense, coal, and oil and gas industries. MRI is a useful noninvasive technique for imaging internal biological materials, such as human organs, "but imaging dry, solid materials is more difficult, and the hardware needs further work to be practical," said Timothy Fox of BIR.


MRI involves surrounding an object with a strong magnetic field—which makes most of the object's atoms point the same way, much like tiny compass needles—then perturbing the alignment with a strong pulse of radio-frequency signals. After the pulse, the atoms relax and realign, giving off radio frequency signals in the process. These signals characterize elements within the sample.

The Argonne-BIR project will focus on improving the coil that generates perturbing radio signals and receives relaxation signals. Argonne will review and evaluate coil designs and use computers to develop and test preliminary models. BIR will develop electronics to tune and control the coil during pulse generation and reception of relaxation signals. "We need to develop coils that put out a more powerful pulse in less time," said Stephen Dieckman of Argonne. "The pulse also has to be more

consistent over a greater volume, so we can study larger samples more accurately. The coil also has to recover quickly after it delivers the pulse, so it is ready to receive the relaxation signals. They start coming back immediately after the pulse and may last only a few millionths of a second," he said.

MRI would be useful, for example, in studying voids in ceramics, the makeup of polymers, the internal structure of solid rocket engines, or the geology of deep-earth samples.

NEW: A Faster, Easier, and Less Expensive Apparatus for Superconductor / New Materials Synthesis

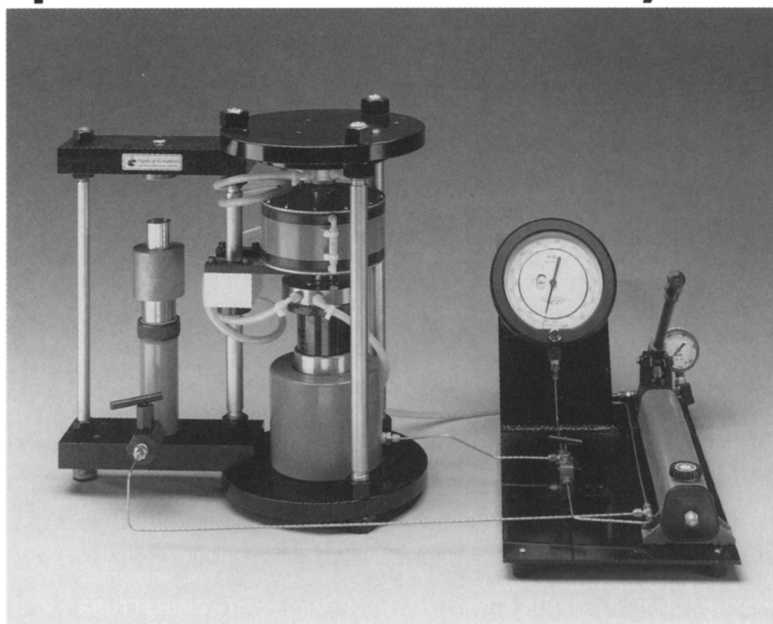

QUICKPRESS™


High Pressure High Temperature Piston-Cylinder

Ingenious top loading design makes operation unusually easy.

Temperature range: 25° to 1600° C. Pressure range: 5 to 25 kilobars.

Sample container size: 5 mm diameter cylinder

5 mm high (30 mm³ volume).



Depths of the Earth Company

822 S. MILL AVENUE, SUITE 242 • TEMPE, AZ 85281
(602) 921-1306 • FAX (602) 967-3429

Circle No. 12 on Reader Service Card.

Lead Crystals Superheated Up to 120 K Above Bulk Melting Temperature

Using a split-beam laser system, researchers at the University of Rochester have heated [111] lead crystals well above their bulk melting point and quickly recorded images of the crystal structure before it could change to the liquid state. Hani Elsayed-Ali at Rochester's Laboratory for Laser Energetics said of the superheated solid form, "We see the atoms before they 'know' what hit them—the crystal hasn't had time to melt yet." Even at 120 K above the bulk solid-to-liquid transition temperature of 600.7 K, the lead crystals remained solid long enough—a few trillionths of a second—to allow the researchers to observe them.

With an ultrafast laser, Elsayed-Ali and John Herman delivered 180 picoseconds of Nd:YAG laser power to the lead crystal. At this point, a few atoms begin to vibrate out of position, but not enough to shake loose

and disorder the lattice, thereby transforming the solid into a liquid. The authors say that the melting is bypassed by the large heating and cooling rates, which are on the order of 10^{11} K/s. Another key to the Rochester experiment is the [111] crystal orientation of the exposed surface of the lead crystal. The tight packing of the atoms in this plane slows the movement of those atoms. Similar experiments on the more open Pb(110) surface did not show this superheating behavior.

The laser was split into two beams—one heated the sample and the other activated an electron gun whose electrons bombarded the sample just a few picoseconds after the sample was heated by the laser. The electrons bounced off the atoms in the sample's surface and formed a reflection high-energy electron diffraction pattern, revealing the lattice of the crystal.

Elsayed-Ali and Herman wrote about their evidence for superheating in the August 24 issue of *Physical Review Letters*.

E.A. Giess Joins UNC Charlotte

Edward A. Giess, formerly with IBM's T.J. Watson Research Center, has taken an assignment as a researcher at the Cameron Applied Research Center, within the College of Engineering (Department of Electrical Engineering) at the University of North Carolina-Charlotte. He received his BS, MS, and PhD degrees in ceramics from the SUNY College of Ceramics at Alfred University prior to his joining IBM, where he received awards for his work on garnet materials and liquid phase epitaxy.

Giess has an international reputation in the field of materials preparation and crystal growth. He pioneered in the application of flux growth to the preparation of magnetic materials and magneto bubble garnets. He has made numerous contributions to the growth of electrooptic materials and more recently to the preparation of high T_c superconductors. His most recent research has been on ceramic-polymer composites for electronic packaging, gaining him an IBM Outstanding Achievement Award.

Giess has published 167 articles and holds nine patents. He is a member of many national and international professional societies, and is a fellow of the American Ceramic Society and the American Institute of Chemists. Giess also reviews for the American Ceramics Society, *Applied Physics Letters*, and the *Journal of Crystal Growth*.

SDI Heat-Resistive Materials Developed for Commercial Application

The Strategic Defense Initiative's Small Business Innovation Research program has selected a company, Ultramet, to further develop a heat-resistant material for the throats of rocket engines. The contract is expected to be valued at about \$500,000.

During rocket blastoff, fuel combustion erodes the lining of the throat thermally and chemically. The material developed by Ultramet, a hafnium carbide/tantalum carbide composite, has a higher melting temperature and is more chemically inert than currently marketed materials. The new material allows hotter burning fuel, in turn allowing a higher release of energy.

The composite remains protective at 3900°C, compared to current materials that melt at 3300°C, and erodes at 0.02-0.2 mils per second, a tenth of today's rate of 2-3 mils per second.

Besides jet engines, applications for the material may be found in power generating plants, internal combustion engines, and communications satellites.

Instructional Scanning Tunneling Microscope for Under \$15,000*


Nobel Prize STM Technology Designed for the Teaching Lab...for STM Assimilation...for Investigative Research.

- Atomic resolution imaging and sub-Angstrom measurement of surface/material structure and topography for teaching or for learning.
- Easy to operate rugged design with quick sample/tip change.
- User friendly Windows-based True Image™ software allows sophisticated image processing and data manipulation - use with your 386/486 PC.
- Supplied with instruction manual, workbook, and sample set.

- 30 day satisfaction guarantee, one year warranty.

Call 716/924-9355 or fax/write for free brochure and to request the free video tape introduction to Burleigh's Instructional STM™ System, or for information about our UHV/STM Systems.

*USA Introductory List Price - Educational Discounts Available.

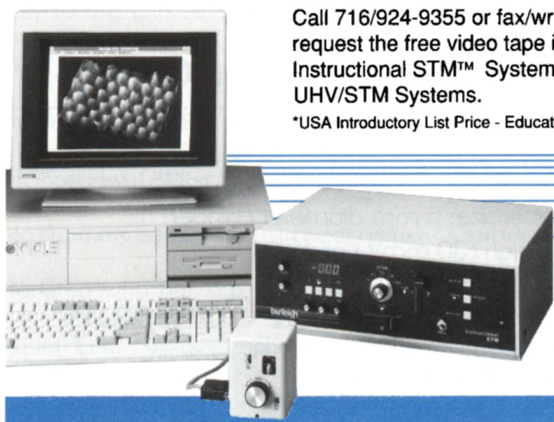

burleigh

...RELIABLE PRECISION

Burleigh Instruments, Inc.
Burleigh Park, Fishers, NY 14453
716/924-9355 FAX: 716/924-9072

Circle No. 13 on Reader Service Card.

Packaging Pursued for Eveready/ORNL Thin-Film Battery

Oak Ridge National Laboratory and the Eveready Battery Company are developing a method for packaging rechargeable thin-film lithium batteries. Eveready is developing a 2.5-volt solid-state battery, while ORNL's is 3.7 volts. The prototype in the ORNL lab is 4-6 μm thick by about 1 cm^2 , although thin-film batteries could be designed for a variety of sizes depending on the application. The work is being done under a cooperative research and development agreement (CRADA).

John Bates, leader of the ceramic thin films group at ORNL's Solid State Division, said, "Our goal is to develop a microbattery. The microbattery could be fabricated directly onto a computer memory chip to preserve information in the event of a power failure. But before the thin-film battery is ready for commercialization, we must develop a protective thin-film coating." The coating is necessary to seal the batteries and protect the lithium film from atmospheric corrosion. For now, the batteries are kept in an argon atmosphere. "We will work with Eveready on determining which thin-film material or combination of materials could best seal up the battery without altering the properties of the films," Bates said.


Traditional circuits use nonrechargeable batteries much larger than chips, added as separate components, to prevent data loss during power failures. A thin-film battery could be placed directly into an integrated circuit during manufacture. Besides memory backup, a solid-state microbattery could be used as a power source for miniature sensors and micromotors.

ORNL's thin-film battery is created by depositing one layer of material at a time on a ceramic or glass support. The first layer, noncrystalline vanadium oxide, forms the positively charged electrode, or cathode. The second layer, the electrolyte (lithium phosphorous oxynitride), conducts lithium ions and separates the electrodes between which electrons flow in an external circuit, providing electrical energy. The top layer, lithium, forms the negatively charged electrode, or anode. Eveready's battery uses different materials for the cathode and electrolyte.

Working together, the two groups will deposit protective layers on test cells supplied by Eveready. The procedure will allow the battery to be sealed in place, for example, on a carrier for a computer memory chip.

(continued on page 19)

High Purity PVD Materials

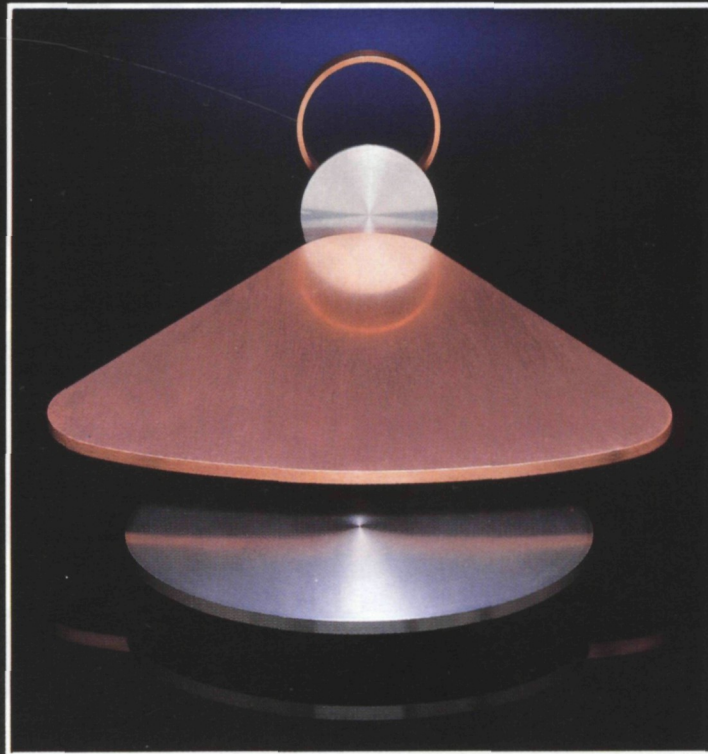

Whether for R&D or production,
Pure Tech manufactures
the high quality product you need

MATERIALS—Selection is virtually unlimited. Pure metals, alloys, non-metals and cermets are all available in various purities to satisfy any requirement. Pure Tech specializes in difficult and unusual materials for sputtering and evaporation.

SPUTTERING—Targets can be produced in a wide range of shapes and sizes for almost any machine.

EVAPORATION—Materials for E-Beam/ Thermal Evaporation can be provided as granules, pellets, rectangles, rods, wire and shaped starter sources.

ANALYSES—All materials are analyzed to insure consistent high quality. Lot spectrographic analyses are provided at no charge with every shipment.

TARGET BONDING—A proprietary technique is used to metallic bond sputtering targets to backing plates to insure high thermal and electrical conductivity and ease of removal of spent targets.

QUALITY CONTROL AND PACKAGING—All materials receive a thorough final inspection, are cleaned (vapor degreased, ultrasonic cleaned and etched, where appropriate) and sealed in a protective atmosphere to insure that they are received ready for use.

SERVICE—With quick responses to inquiries, accurate technical assistance, and reliable, on-time deliveries, Pure Tech has built its reputation on service.

For your sputtering or evaporation needs, please call for price and delivery or send now for our free four color brochure.



PURE TECH INC.

P.O. Box 1319, Carmel, NY 10512
TEL (914) 878-4499 FAX (914) 878-4727

Circle No. 14 on Reader Service Card.

Where to turn when x-ray analysis or imaging leaves you in the dark

Turn, if you will, to Princeton Gamma-Tech. We've been developing innovative X-ray analysis and imaging hardware/software solutions for longer than anyone in the business. We know that no one likes to be left in the dark. Thus, we count in-depth technical support among our most important products.

Technical support at PGT means applications support, professional user school training, day-to-day technical assistance or 24-hour service support. Each is readily available to you worldwide – not just in words but in deeds. Ours is an unusually strong technical support orientation; we've been perfecting it for 25 years.

Having left the dark behind, here are two of the brightest and best PGT products you should know more about:

IMIX™ PGT's state-of-the-art X-ray micro-analysis/imaging system, is a high-powered analytical package with nothing left out, or to chance. Today's research requirements are met; tomorrow's are anticipated. IMIX utilizes a SUN SPARCstation™ workstation for multiuser/multitasking capability – with 32-bit architecture for superior processing power and speed. A click of the mouse starts X-ray collection or a complete analysis. Unsurpassed workstation graphics capabilities permit display of images, graphs and analytical data – all on a single screen.


Powerful PGT processing and analysis software extracts all of the data locked within your samples. And analysis of non-ideal samples is handled automatically with unique artificial intelligence-based programs.

It's a remarkable system. One that increases throughput and lab productivity through automation and simplicity of operation.

IMAGIST™ is another PGT leading-edge workstation system. Designed for light microscopy and electron column-based image processing and analysis, it is also SUN SPARCstation™ based. It's an affordable and totally complete package for automation, acquisition, image processing, analysis and presentation. Researchers can quickly collect images, easily extract features and information from samples, process and analyze them – and then present results.

Having seen the light, contact PGT for more information.

Please visit Booth No. 921-922 at the MRS Equipment Exhibit/Table Top Display in Boston, December 1-3, 1992.

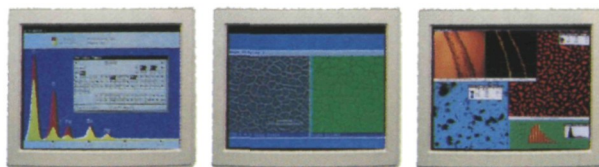


A Member of the Outokumpu Group

PRINCETON GAMMA-TECH, INC., 1200 State Road, Princeton, NJ 08540 Tel: 609-924-7310 Fax: 609-924-1729 PGT, UK, Business & Technical Center, #2-4 Mancetter Square, Warrington, Peterborough PE4 6BX Tel: (733) 324-686 Fax: (733) 324-204 Outokumpu Electronics, P.O. Box 85, SF-02201, Espoo, Finland Tel: +358 0 4211 TLX: 123677 OKEL SF Fax: +358 0 421 2614

Circle No. 15 on Reader Service Card.

Measure from atmosphere to ultrahigh vacuum on one gauge control ... without filament burnout!

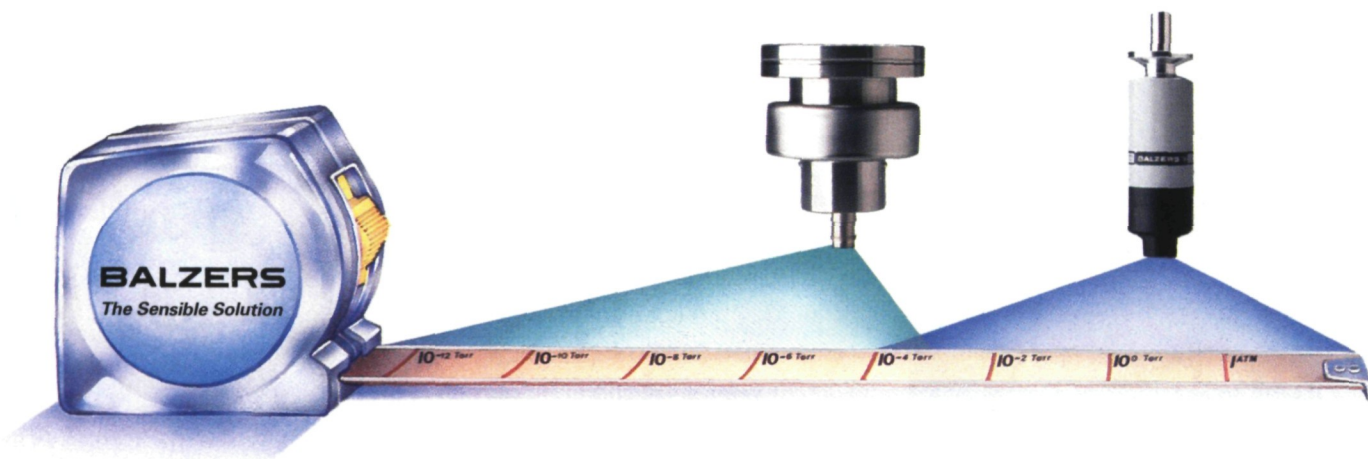

The Balzers TPG 300 Total Pressure Gauge

We've removed the limits imposed by thermocouple and hot-cathode gauges and designed a single solution to all your vacuum-measurement needs! With its range, the TPG 300 total pressure gauge can replace as many as four separate gauges. It has no filament—so, no filament burnout. Twelve programmable switching points and microprocessor control permit efficient management of your vacuum system to cut operating costs.

All this performance comes in a small, modular package incorporating two technologies—regulated bridge Pirani and inverted magnetron cold cathode (not a Penning). This combination ensures better process control and a response 10 times faster than you get with a thermocouple gauge and reliable tracking across the complete vacuum range. The TPG 300 is also available in a corrosion-resistant version for measuring aggressive gases.



Contact Balzers now for more information on the one gauge control that measures from atmosphere to 10^{-12} Torr, without filament burnout!

Please visit Table Top No. 32 at the MRS Equipment Exhibit/Table Top Display in Boston, December 1-3, 1992.

BALZERS

Balzers • 8 Sagamore Park Road • Hudson, NH 03051
TEL (603) 889-6888 • FAX (603) 889-8573

Balzers Aktiengesellschaft • FL-9496 Balzers
Fürstentum Liechtenstein
TEL (075) 441111 • FAX (075) 42761

Circle No. 16 to receive literature.


Circle No. 17 to have a sales representative contact you.

© Balzers 1991

CALL QUANTUM DESIGN: THE PROBLEM SOLVERS



HIGHRES SCANNING MAGNETOMETER

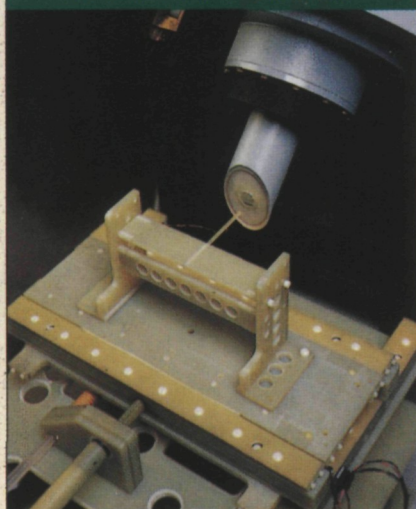


...achieves high resolution and sensitivity with unique close spacing and non-magnetic 3D positioning.

We've worked hard to build a reputation as the leaders in helping people solve sensitive magnetic measurement problems.


Today, as we move into our second decade, our unique modular designs and patented SQUID technology offer a selection of off-the-shelf systems, instruments and components that are second to none - while providing the basis for comprehensive *custom* solutions as well.

SINGLE & MULTICHANNEL DC SQUID

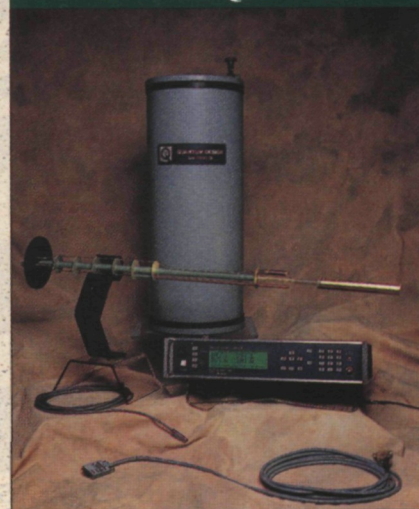

...systems and instruments can be configured as magnetometers or gradiometers to fit varied measurement needs

COMPLETE TURNKEY SYSTEMS

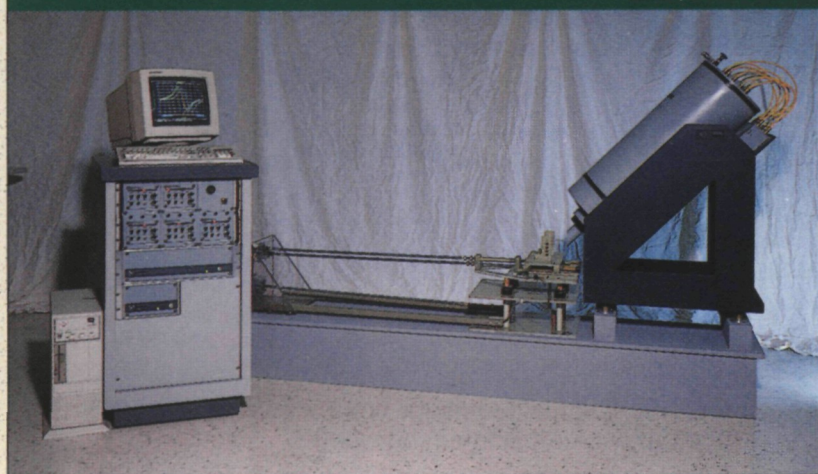

...like this High-resolution scanning magnetometer meet advanced non-destructive testing & evaluation requirements.

Capabilities include:

- Close spacing of SQUID to sample for ultra-high sensitivity.
- Ability to measure small magnetic signals in large ambient fields.
- Custom detection coil configurations for magnetometer and gradiometer arrays.
- DC SQUID controller provides easy computer interface and control via GPIB or RS-232.
- Unique non-magnetic Dewar Systems.

Please visit Booth No. 408 at the MRS Equipment Exhibit/Table Top Display in Boston, December 1-3, 1992.



Delivering Advanced Technology Today

11578 Sorrento Valley Road, Suite 30
San Diego, California, USA 92121-1311
Phone: (619) 481-4400
Fax: (619) 481-7410
Telex: 4943226

800-289-6996

Call Toll-free for complete details on turn-key systems, individual products or custom solutions.

Circle No. 18 on Reader Service Card.

Government, Academia, Business Join Forces at Advanced Materials Lab

The Advanced Materials Laboratory (AML), a venture of the University of New Mexico (UNM), Sandia National Laboratories, and Los Alamos National Laboratory (LANL), was recently dedicated at the University Center Research Park, a 100-acre business park in Albuquerque, New Mexico. The facility represents a new collaborative approach in research and development that will be applied to transferring resulting technologies to U.S. industries.



Senior Senator from New Mexico, Pete Domenici (right), and MRS First Vice President, Tom Picraux, attend the dedication of the Advanced Materials Laboratory in Albuquerque, New Mexico.

The project is one of the first collaborative laboratories of its type. Sandia scientist and AML co-director Ron Loehman said, "This lab is an excellent example of an entity that brings the GUILD (government-university-industry-laboratory development) concept to fruition. We've done that here. Moreover, we're going to have the staff from the two national labs—Sandia and Los Alamos—working together on a continuing basis in the same building." Also, for the first time, says Sandia president Al Narath, Sandia researchers will be located away from Sandia's main site on Kirkland Air Force Base, on a permanent facility near UNM.

At UNM, the Center for Micro-Engineered Ceramics and the Center for High Technology Materials have long-standing relationships with the national labs and industry, so the new facility evolved from the relationships that already existed between the University of New Mexico and the national laboratories.

AML occupies about 46,000 square feet of a new 64,000-square-foot building. The \$5 million facility is being completed in two stages. The south wing is now occupied by Sandia and UNM researchers. The west

wing is being completed this fall and will be occupied by LANL.

Initially the AML will house about 65 people, including Sandia staff members, UNM professors, students, postdoctoral researchers, and three companies—Duke Scientific, Superkinetics, and Radiant Technologies. Space is available for collaborations with industrial scientists to facilitate transfer of technology developed at Sandia, Los Alamos, and UNM to U.S. industry.

AML will provide state-of-the-art facilities in materials synthesis, processing, and analysis. For synthesis of some new materials, AML will have class 100 and 1000 clean rooms. Researchers also will be able to synthesize new materials in hydrothermal environments and in supercritical fluids, and to make novel glasses. For processing, AML will have the ability to make fine powders, sol-gel materials, electro-ceramic films, ceramics, chemical sensors,

and advanced battery materials. For characterization and analysis, AML will contain equipment for ion microprobe analysis, nuclear magnetic resonance, imaging ellipsometry, dynamic light scattering, electron microscopy, and spectroscopies including electron spin, Raman, x-ray photoelectron, Auger electron, and thermal. Initially, about two thirds of the research will focus on ceramics and one third on metals and polymers.

R.M. Christensen Named Honorary Member of ASME


Richard M. Christensen, a senior scientist in the Chemistry and Materials Science Department at Lawrence Livermore National Laboratory, has been named an honorary member of the American Society of Mechanical Engineers (ASME). Honorary membership is awarded for lifetime service to engineering. Christensen received the honor "for distinguished contributions to


Vacuum Pump Vibration Isolator

NEC Vibration Isolators effectively remove turbomolecular and cryo pump vibrations.

Available in elastomer and air-isolated versions, they are UHV compatible, have short insertion lengths and high conductance. A wide variety of flanges are available.

Contact NEC for further details concerning the Models VI-1 and the VI-2 vibration isolators.



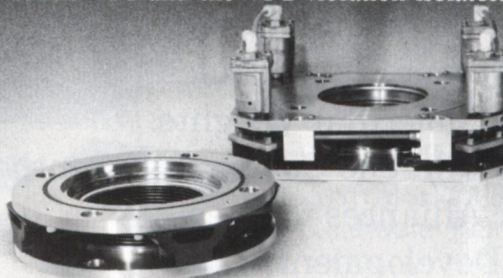


 **National
Electrostatics
Corp.**

Graber Rd., Box 310, Middleton, WI 53562
Tel. 608/831-7600 • Fax 608/256-4103

Circle No. 19 on Reader Service Card.

Please visit Booth No. 708 at the MRS Equipment Exhibit/Table Top Display in Boston, December 1-3, 1992.



HAVE A BALL!

Get your Fullerenes,
"Buckyballs" C₆₀ to C₇₀ here!


Under license from Research Corporation Technologies, we've scaled up the Huffman-Krätschmer method for vaporizing carbon and extracting Fullerenes using a non-polar solvent.

As the sole licensee for this exciting new form of carbon, MER will meet your long term requirements as well as your immediate research needs for Fullerenes.

MER will meet or beat any competitive quote on Fullerenes!

Call us for:

- Pure C₆₀ or C₇₀ From Stock.
- Mixed Fullerene Extract.
- Unprocessed Fullerene Soot.
- Deposited Thin Films.
- Molded Fullerene Shapes.
- New Fullerene Nanotubules!
- Specialty Molecular Weights.
- Custom Fullerene Compounds Synthesis.
- Strategic Alliances for New Product Development.
- Fullerene Production Systems.



FULLERENES TO GO!



Materials & Electrochemical Research Corporation

7960 S. Kolb Road
(602) 574-1980


Tucson, Arizona 85706
FAX (602) 574-1983

mechanical engineering through original research, conceptual design of materials, and service to the profession and governmental laboratories."

Christensen earned his BS degree from the University of Utah in 1955 and his M.Eng. and D.Eng. from Yale University in 1956 and 1961 respectively.

Polycrystalline Cubic Boron Nitride to be Commercially Produced

The Research Development Corporation of Japan (JRDC) has commissioned Denki Kagaku Kogyo K.K. to commercialize the production technology of high-purity, polycrystalline cubic boron nitride, originally a result of research by the National Institute for Research in Inorganic Metals of the Science and Technology Agency. The company recently developed a better production method than was earlier available for its mass production.

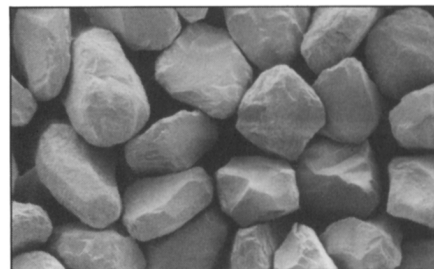

Polycrystalline boron nitride particles.
(Photo courtesy of Hideo Ohara.)

Because diamond wears easily when cutting iron, cubic boron nitride—which is almost as strong as diamond and wears more slowly when cutting iron—is used for grinding and cutting materials containing iron. Traditional methods for producing cubic boron nitride use, as a starting material, hexagonal boron nitride powder processed under ultrahigh pressure and high temperature. The product has been a single crystal with low toughness.

In the new technology, high-purity, polycrystalline thermolytic boron nitride is formed, the material is synthesized by a chemical gas-phase growth method, and then laminated plurally and by means of a direct conversion method and a reaction crystallization method. Polycrystalline boron nitride consisting of crystal particles as large as 10 times that of traditional ones (50 μm compared to 5-6 μm) can be produced. The product is expected to be used for cutting cast iron and cemented carbide and, due to its high thermal conductivity, for heat sinks of electronic devices.

F.S. Myers

Circle No. 20 on Reader Service Card.

Bumps Improve Efficiency of Solar Cells

Taiyo Yuden Co. and the Agency of Industrial Science and Technology's Electro-technical Laboratory have developed a new way to make amorphous silicon solar cells thinner without sacrificing the conversion efficiency. Their technique involves growing a bumpy layer of tin oxide on a glass substrate. Light passing through the amorphous silicon layer on top of the tin oxide is reflected back into the solar cell, thereby increasing the path of the light and giving the amorphous silicon more time to convert light into electricity. The bumps consist of micron-sized crystals made during the fabrication of the tin oxide conductive layer over the glass substrate. But unlike the transparent tin oxide layer, the bumps are opaque.

According to the researchers, the bumps boost to 10.7% the conversion efficiency of a solar cell made with an amorphous silicon layer 0.6 μm thick, which is nearly double the rate of conventional solar cells of similar thickness without bumps. The bumpy structure helps resolve one problem with solar cells: when the amorphous

silicon layer is too thin, the absorption of sunlight may not be enough; a thicker layer, however, can impede the carrier flow.

F.S. Myers

Electron-Beam-Excited Plasma Etching System Developed

The Institute of Physical and Chemical Research (RIKEN) and Kawasaki Heavy Industries Ltd. have jointly developed new etching equipment that applies the method of electron-beam-excited plasma (EBEP). A plasma, produced using electron beams, is used to etch large-scale integrated circuits onto a silicon substrate.

Plasmas are conventionally generated using electron cyclotron resonance. While this method can produce high-density plasma under low pressure, it is not as effective at producing uniform large-diameter plasmas in the presence of a magnetic field. The EBEP method can produce a uniform, high-density plasma all over the substrate and without causing any damage to the substrate. The system introduces a high-current low-energy electron beam

into the etching gas chamber. This new equipment is expected to play an important role in the production of future semiconductor devices such as 64M DRAM chips, the next generation of semiconductor memory devices.

F.S. Myers

Chemat Awarded SBIR Grant for Sol-Gel Thin Film


Chemat Technology, Inc. has been awarded a \$50,000 Phase I Small Business Innovation Research Grant for development of low-cost, weather-resistant photochromic thin films. Under the Defense Advanced Research Projects Agency grant, the large photochromic coatings will be placed on field equipment using the sol-gel technique. If successful, the development could provide a low-cost approach for making photochromic articles.

Anticipated application areas include optical storage, optical switches, photochromic window glasses, glass lenses, and automatic glasses. Photochromic window glasses could be beneficial for energy conservation, for example.

**UNMATCHED
PRECISION.
QUALITY
SEMICONDUCTOR
MATERIALS
PROCESSING
SINCE 1967.**

**SEMICONDUCTOR
PROCESSING
COMPANY**

409 East First St., Boston, MA 02127
617/269-4422 FAX: 617/269-4659

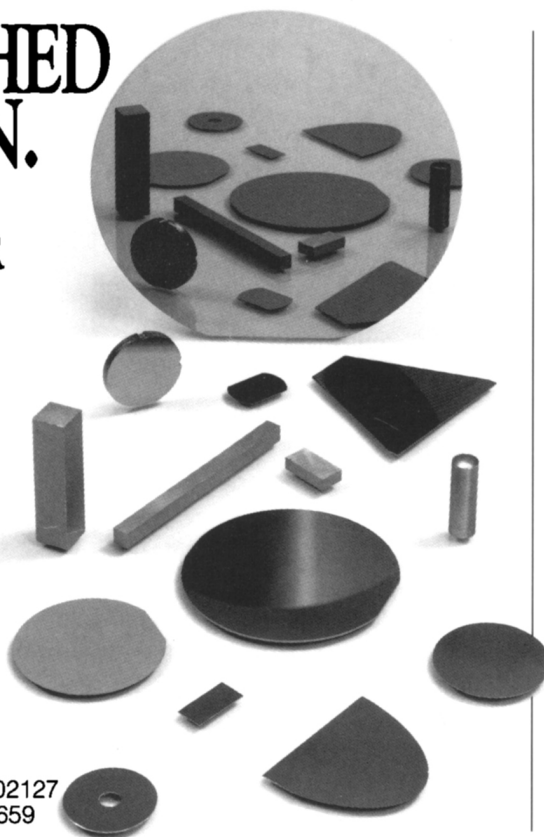

ADVANCED TECHNOLOGY. Simultaneous two-sided polishing for high precision micromachining applications. 76mm and 100mm silicon wafers with <math><2\mu\text{m}</math> thickness variation!

SPECIAL MATERIALS. Silicon, germanium and a variety of III-V compound semiconductors.

CUSTOM SERVICES. Complete wafer fabrication. Slicing, grinding, lapping, polishing and dicing.

FLEXIBILITY. Virtually any orientation, shape, size or thickness. Research or production quantities in 4 weeks or less.

QUALITY CONTROL. Quality and calibration systems conform to MIL-I-45208A and MIL-I-45662.

Circle No. 21 on Reader Service Card.

Nanoprecision Manufacturing Laboratory Established at UCONN

The Advanced Technology Center for Precision Manufacturing at the University of Connecticut (UCONN) at Storrs has recently established a Nanoprecision Manufacturing Laboratory. The objective of the

laboratory is to conduct basic research to precisely assemble large numbers of atoms and molecules into bulk nanostructured materials, and at low cost.

A pilot-scale facility for synthesizing large quantities of nanostructured powders has been completed and includes an industrial-scale spray-drying unit, and a fluidized-bed reactor system. Chemistry

and materials processing methodology for synthesizing some composites have also been developed. Materials characterization will be emphasized. Facilities exist for atom imaging using STM and AFM. SIMS, XPS, AES, and HRTEM are available to researchers as well. These new facilities augment existing materials synthesis laboratories at the university's Institute of Materials Science, such as the laser laboratory, the ion beam surface modification laboratory, controlled atmosphere hot-wall reactors with ultrasonic spray atomizers, and instruments for high-temperature thermal analysis.

The composites being developed have been specifically selected for high-temperature, high-heat conductivity, and ultrahigh hardness applications. Also, chemically synthesized nanostructured powders are being investigated as special property thin films and industrial coatings. A thermal spray laboratory and robotics will be used to achieve precision and reproducibility.

The chemical synthesis program is headed by Kenneth E. Gonsalves, Department of Chemistry and Polymer Science, and Peter R. Strutt of the Metallurgy Department.

GE, NREL Sign Agreement on Superconductivity Research

The Department of Energy's National Renewable Energy Laboratory (NREL) and General Electric Corporation have signed a cooperative research and development agreement (CRADA) to advance research in superconductivity. The CRADA builds on scientific collaboration during the past year by researchers at the General Electric Research and Development Center in Schenectady, New York, and NREL.

A novel coating technique led the two groups into the formal agreement. Harley Lake, project development manager at GE's materials research center, said, "We're delighted to have the opportunity to work collaboratively with NREL on this new technology for a high-temperature superconducting material."

The agreement aims to develop new techniques for processing thallium-based oxide material in order to find cheaper methods of manufacturing high-temperature superconducting wires and tapes. Thallium-based oxides are more flexible than other high-temperature superconducting materials, and the GE/NREL CRADA seeks a cheaper way to manufacture wires and tapes from it. The CRADA is for one year and specifies lowering the cost of generating and supplying electricity to utilities.

Win the Race in Research!

FTIR for Research • FTIR for Research • FTIR for Resea

With:

Versatility

- Complete systems for multi-experiment, multi-user measurement needs with quick trouble free experiment change-over.
- Low cost, minimal configurations for specific measurement needs with future upgradability.
- Dedicated configurations.

Flexibility

One system covers:

- Full spectral range from 4 cm⁻¹ in far IR to 55 000 cm⁻¹ in UV.
- Resolution range from 64 cm⁻¹ to 0.0026 cm⁻¹
- Interchangeable detectors for all spectral regions and sensitivity needs.

Accessibility

- Open spectrometer hardware and software architecture.
- Wide choice of computer selectable operating parameters.
- Source code provided
- Spectrometer is a node on thin-wire Ethernet.



Our customers have achieved breakthrough results in:

- High resolution wide spectral range photoluminescence of many semiconductor materials and structures.
- Impurity studies in semiconductor materials by transmission, reflection and PTIS.
- Molecular structure determination by high resolution gas phase spectroscopy.
- FT Raman spectroscopy of light sensitive proteins.
- In situ measurement of minor constituents related to ozone chemistry.
- Atmospheric chemistry.
- Matrix isolation studies of unstable radicals.
- Characterization of high T_c and other ceramic materials in far IR.

FTIR for Research • FTIR for Research • FTIR for Resea

Circle No. 22 on Reader Service Card.

Now you can buy a top-of-the-line FTIR at a mid range price

BOMEM
Hartmann & Braun

Bomem Inc./Hartmann & Braun
450 Saint-Jean-Baptiste Ave.
Quebec, Quebec
Canada G2E 5S5
Tel.: (418) 877-2944
North America: 1 800 858 FTIR

This product line is under GSA schedule GS-90F-2401A

Researchers Link Metal Oxide Structures with Catalytic Properties

Researchers at the Georgia Institute of Technology have found a way to choose or create metal oxide catalysts for reactions more reliably by studying the links between the structure of catalysts and their effects on chemical reactions. Mark G. White, director of Georgia Tech's Focused Research Program in Surface Science and Catalysis, said, "We are showing unambiguous relationships between structure and catalytic properties." The research was presented at the American Chemical Society's annual meeting in Washington, DC.

The key to the work is the creation of single layers of special metal-containing catalytic molecules on a ceramic oxide surface. The researchers synthesize metal complexes using nucleophilic groups present as ligands—particles that form a molecular "glue" that binds to metals, such as those in the catalytic molecules. The ligands also

show an affinity for the surface of ceramic substrates, promoting the deposition of the molecules in a thin layer on the substrate.

Depositing a single layer of molecules is harder than making multilayers, but it is more efficient since only the top layer is effective. Also, "by forming a single layer," White said, "you can effect a great deal of control on the structure that these special molecules will form on the ceramic oxide surface. You must know the structure to relate to properties."

The researchers developed a family of copper-bearing catalysts, each of which contains the same amount of copper—between one and two percent by weight—but have different configurations of the copper atoms. Researchers verified the structures of the substances using selective chemisorption, electron paramagnetic resonance, and TEM. The researchers then incorporated the catalysts into several important industrial reactions and studied the results. The addition of hydrogen to ac-

etaldehyde proceeded with all four catalysts present, but the distribution of the products that resulted from each catalyst were different. Only the catalysts having two or more copper atoms per ensemble were active in the decomposition of methanol; the catalysts having six atoms per ensemble were active in the synthesis of methanol and ethanol from methyl acetate and hydrogen.

White said the work helps explain catalytic action and offers the ability to produce good catalysts without much trial and error. These processes could be applied to making fine chemicals, substances that are expensive to create and are used in small amounts in products such as detergents, and could provide high quality control and selectivity. Other uses of the technology would be as a chemical enhancer in protective clothing, a pollution removal agent for power plant flues, and as the basis for reducing methyl acetylene into propylene.


(continued on page 27)

SOPRA

VASE FTIR MODEL 3

Automated variable angle spectroscopic ellipsometry by Fourier transform infra-red.

- BULK SAMPLE, REAL AND IMAGINARY INDICES CALCULATION
- SINGLE LAYER, THICKNESS AND REAL AND IMAGINARY INDICES CALCULATION
- MULTI LAYER DATA REDUCTION
- FULL FTIR CAPABILITIES : ABSORBANCE, TRANSMITTANCE OR REFLECTANCE

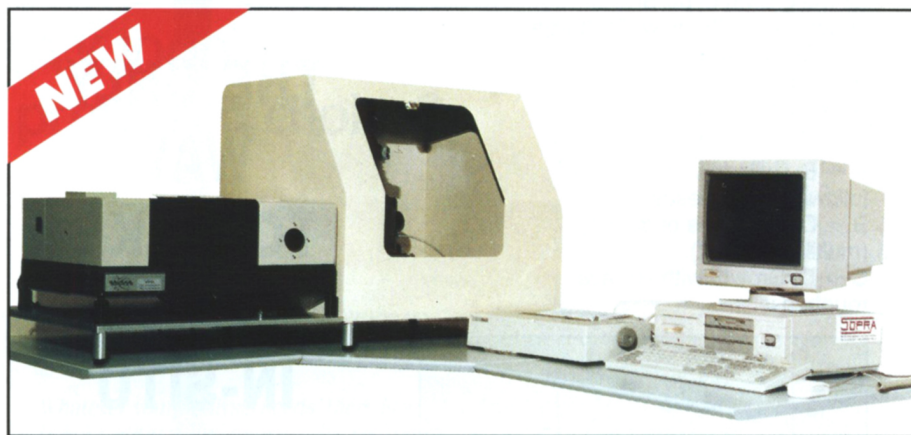

- SPECTRAL RANGE : 5000 cm^{-1} TO 600 cm^{-1} (2 TO 16 μm)
- SPECTRAL RESOLUTION : VARIABLE FROM 2 TO 32 cm^{-1}
- BEAM DIAMETER : 3 TO 12 MM MANUAL SETTING

- ANGLE OF INCIDENCE : COMPUTER CONTROLLED, SETTABLE FROM 40° TO 90° ± 0.01°
- MEASUREMENT TIME: 2 TO 420MIN
- REPEATABILITY : FOR TAN PSI = 1 : ± 0.006 FOR COS DEL = 0.5 : ± 0.009

SOPRA S.A. 26 rue Pierre Joigneaux,
F - 92270 BOIS-COLOMBES
FRANCE
Tél. 33 1 47 81 09 49
Fax 33 1 42 42 29 34

SOPRA GmbH Schubertstrasse 9-11
DW - 6087 Buettelborn 1
GERMANY
49 61 52 5092
49 61 52 55201

SOPRA Inc. 33 Nagog Park
PO Box 2619
MA 01720 ACTON • USA
1 508 263 2520
1 508 263 2790

SEIKA corp. Nishi-Shinjuku Takagi Bldg
20-3 Nishi-Shinjuku 1-Chome
160 Tokyo • JAPAN
81 33 346 8311
81 33 346 8314


Please visit Table Top No. 28-29 at the MRS Equipment Exhibit/Table Top Display in Boston, December 1-3, 1992.

Circle No. 23 on Reader Service Card.


OPTICAL CHARACTERIZATION OF THIN FILMS

ULTRAFAST SPECTROSCOPIC ELLIPSO METER

UVISEL™
Ellipsometer
mounted
on a RIBER
MBE chamber.

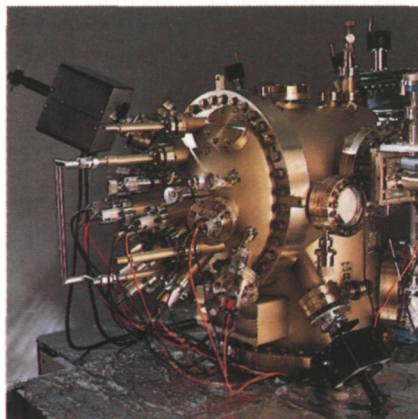

UVISEL™
Ellipsometer
mounted on its
variable angle
of incidence
goniometer (VASE).

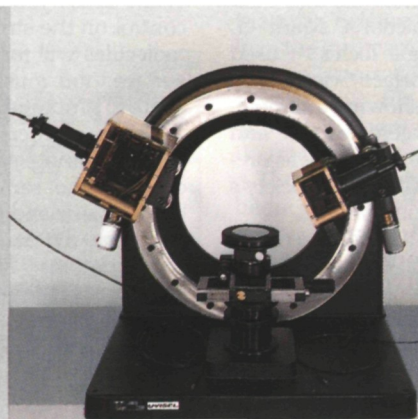

MICRO CRYSTAL GROWTH


Kinetic Ellipsometry trajectory for the growth of $\mu\text{c-Si}$ deposited by RF glow discharge on c-Si substrate.

Best fitted kinetic trajectory showing the three successive steps of the growth.

A \rightarrow B: Cylindrical nucleation followed by coalescence.

B \rightarrow C: Decrease of density (multilayer stack).

C \rightarrow D: Growth with surface roughness.

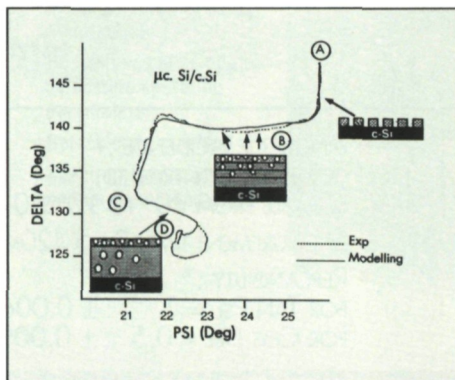


Example of In-Situ application

UVISEL™

THE ONLY WAY TO MAKE REAL TIME IN-SITU THIN FILMS ANALYSIS

COMPOSITE MATERIALS

Imaginary part ϵ_2 of the dielectric function of different kind of silicon versus energy.

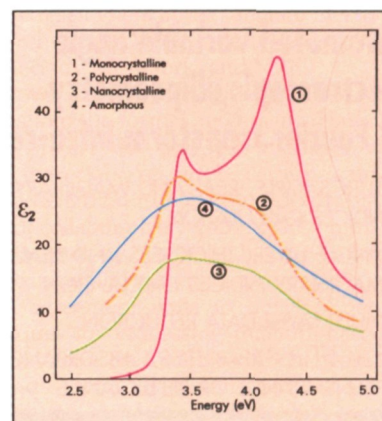

Example of Ex-Situ application

Please visit Booth No. 805-806 at the MRS Equipment Exhibit/Table Top Display in Boston, December 1-3, 1992.


16-18, rue du Canal 91165 LONGJUMEAU
CEDEX FRANCE - Tel. : (33) 1/64.54.13.00
Fax : (33) 1/69 09 07 21 - Télex : JOBYVON 602 282 F


INSTRUMENTS S.A. Inc U.S.A. - Tel. : (1) 908/494 86 60
INSTRUMENTS S.A. GmbH West-Germany - Tel. : (49) 89/460 20 51
INSTRUMENTS S.A. UK Ltd Great-Britain - Tel. : (44) 81/204 81 42
INSTRUMENTS S.A. ITALIA Italy - Tel. : (39) 2/57 60 30 50
INSTRUMENTS S.A. Nederland Netherland - Tel. : (31) 0/1720 24228



JOBIN YVON

DIVISION d'INSTRUMENTS S.A.

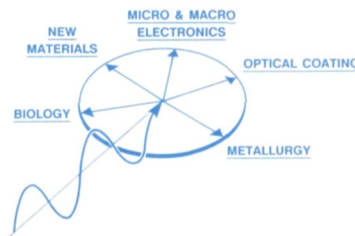

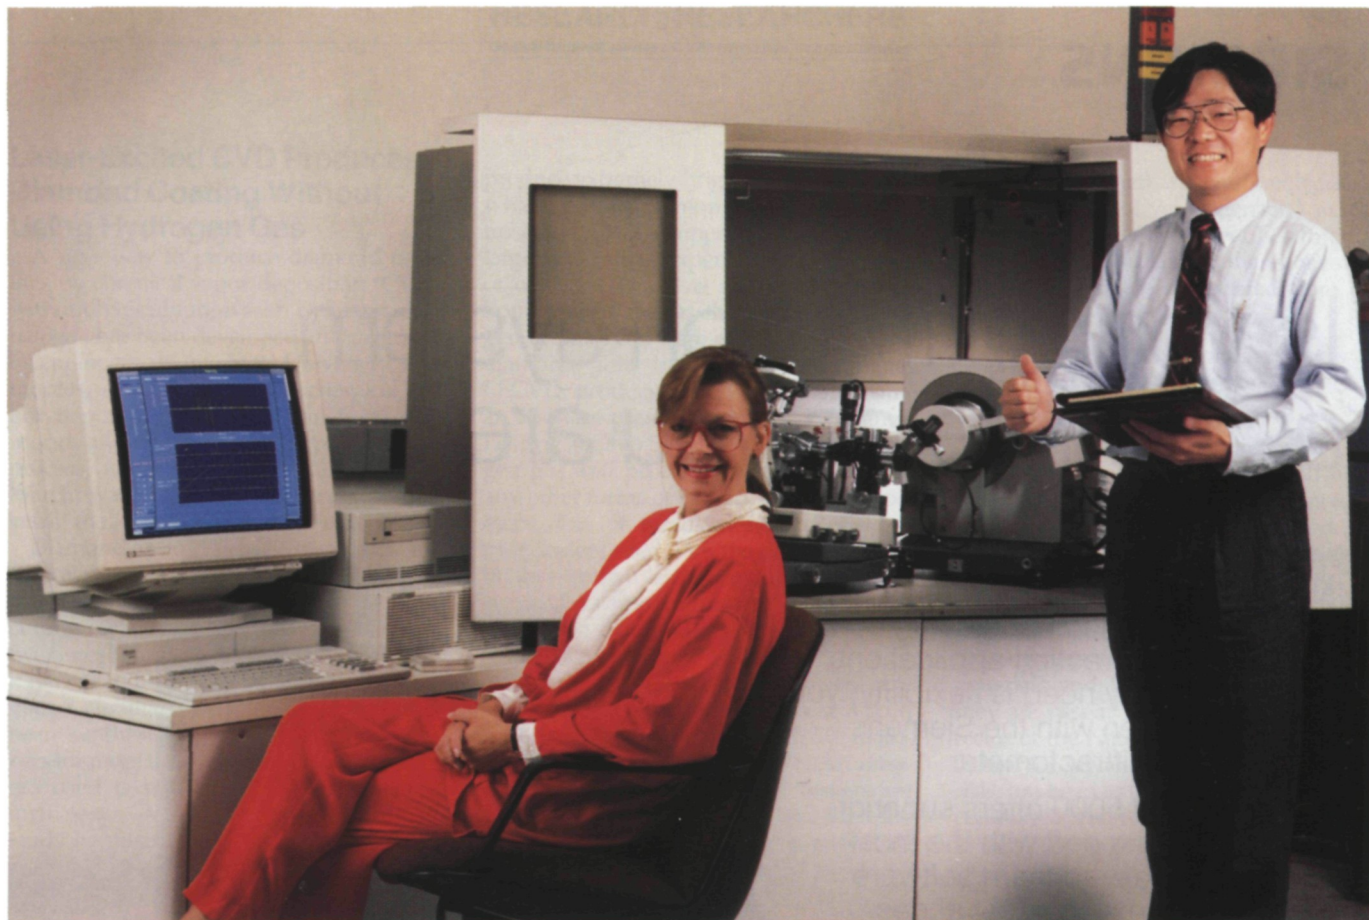

Why are Rigaku D/MAX-1000 Diffractometers the preferred choice?

The Reasons Are Clear.

Full Automation

Goniometer alignment, monochromator control, and slit selection fall into place with a single stroke of the keyboard. No other diffractometer offers such ease of use.

New UNIX-Based Software

Operating in a windows environment, the redesigned system boasts multiple multis. These include multi-tasking, multi-user open access, multi-windows, multi-menus and graphics screen controls, multi-benefits, and multi-cost-effectiveness.

Focus on Specific Needs

The D/MAX-1000 series offers a line of diffractometers that make consistent measurements unparalleled in accuracy and reproducibility. D/MAX-1000 focuses on what is needed without all the gizmos and doodads that no one ever uses

anyway. The system is designed for the precise requirements and comfort level of the individual user.

Whatever your analysis needs, there is a D/MAX-1000 suited for you. Choose from:

- Vertical
- Horizontal
- Theta Theta

Contact our XRD Specialists

Learn more about the Rigaku D/MAX-1000 series and how they can provide the solutions to your analytical requirements. We develop the best diffractometers in the world, but our most important products are solutions for our customers.

Rigaku

Rigaku/USA, Inc.

Northwoods Business Park
200 Rosewood Drive
Danvers, MA 01923 USA
(508) 777-2446
FAX (508) 777-3594

Please visit Booth No. 803-804 at the MRS Equipment Exhibit/Table Top Displays in Boston, December 1-3, 1992.

Circle No. 25 on Reader Service Card.

SIEMENS

Is your diffraction system as flexible as you are?


When the only thing you can count on in your lab is change, don't lock yourself in with a system designed to handle only some of your powder diffraction applications. If what you really need is flexibility, your options are open with the Siemens D 5000 X-ray diffractometer.

The modular D 5000 offers superior accuracy and speed with the most flexible and easy-to-learn software available worldwide. Most accessories can be installed or removed in minutes.


If flexibility is what you need,
Siemens delivers satisfaction.




Raw data, full pattern phase analysis within the EVA2 graphics program.

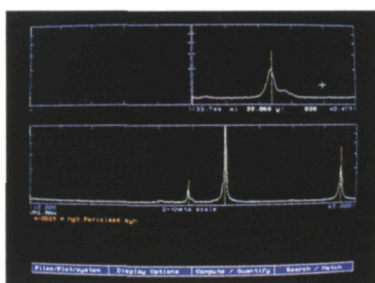


Flexible 3-D texture analysis software includes polefigure and constant phi displays.

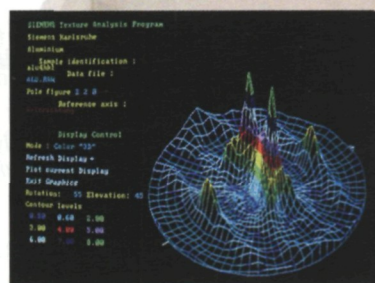

Complete calculation of the full residual stress tensor using uniaxial, biaxial or triaxial stress calculations.

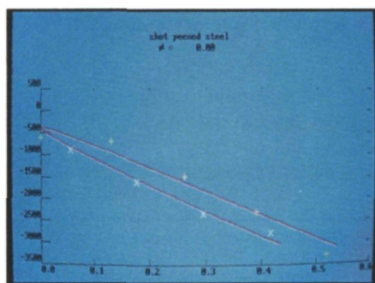

Orientation distribution function (ODF) evaluation software provides complete analysis of texture effects.

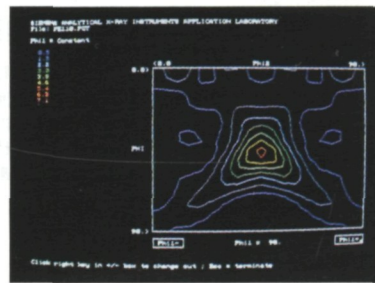

Please visit Booth No. 503-504 at the MRS Equipment Exhibit/Table Top Display in Boston, December 1-3, 1992.

In USA & Canada contact: Siemens Analytical X-Ray Instruments, Inc. • 6300 Enterprise Lane • Madison, WI 53719 • (608) 276-3000
Worldwide contact: Siemens AG, Analytical Systems AUT V 371 • P.O. Box 21 1262 • D 7500 Karlsruhe 21 • Germany • (0721) 595-4295

Circle No. 26 on Reader Service Card.

Laser-Excited CVD Produces Diamond Coating Without Using Hydrogen Gas

A new way to produce diamond coatings by chemical vapor deposition (CVD) without hyperdilution with hydrogen or a halogen has been developed and patented by engineers at Ohio State University. The process, called laser-excited chemical vapor deposition (LECVD), can form diamond at 600-700°C. A paper on the process, which received a U.S. patent in March, was published in the August 1 issue of the *Journal of Applied Physics*.

Diamond is important to industry for several reasons. For example, its hardness protects drill bits and saw blades used for cutting metals and, because it can absorb five times as much heat as copper or gold, it may soon be used in heat sinks for integrated circuits. But while diamond has been synthesized in low-pressure chambers for more than 20 years, the CVD process used is not well-understood and is inefficient. CVD techniques are hard to study because they use intense heat and

produce extremely bright sources of light, which precludes monitoring with spectroscopy. CVD diamond techniques use large amounts of expensive hydrogen gas or corrosive halogens and often produce impure films. It was thought that hydrogen or halogens were essential to making diamond films but the new technique, LECVD, produced by Vish Subramaniam, an assistant professor of mechanical engineering at Ohio State, does not use hydrogen gas and produces diamond without any other forms of carbon. "In other processes, lots of nondiamond material, or soot, is deposited with the diamond. That makes the film less pure and changes its electrical and optical properties." The soot makes the diamond less transparent and more electrically conductive.

Subramaniam and colleagues were able to grow diamond particles on a silicon sample in a chamber filled with 5% methane and 95% carbon monoxide. An infrared laser sets the carbon monoxide molecules vibrating rapidly, and then the carbon monoxide ultimately transfers its

energy to the methane. Although Subramaniam does not yet understand exactly how the diamond is formed, he attributes it to either the excited methane or to the fragments that are dissociated from the methane.

J. F. Young Receives Copeland Award

J. Francis Young, professor of civil engineering and materials science and engineering at the University of Illinois at Urbana-Champaign, has received the Copeland Award from the Cements Division of the American Ceramic Society. The award, given on an irregular basis, recognizes "his outstanding contributions to the development of advanced cement-based materials and to the sciences on which they are based." Young, also associate director of the National Science Foundation Center for Advanced Cement-Based Materials, has been a symposium organizer and committee chair for the Materials Research Society, and in 1988 was a meeting chair.

TAPP

A personal computer database of
**Thermochemical And
Physical Properties**

How many times have you needed to know a vapor pressure, a viscosity, a thermal conductivity or the free energy of formation of a compound but faced a one hour trip to the library to find it? Would you like to find compounds with thermal expansions or boiling points within a specific range? This information is now only a few mouse clicks away with TAPP from **E S MICROWARE**.

TAPP is a personal computer materials property database containing data on the structural, physical, and thermodynamic properties of over 10,000 inorganic and organic compounds. A collection of over 1000 metal, oxide and halide phase diagrams is also included.

PROPERTIES OF OVER 6000 SOLIDS

Crystal structure • Density • Thermal expansion • Elastic properties • Thermal conductivity

PROPERTIES OF OVER 4000 LIQUIDS AND GASES

Critical properties • Density • Viscosity • Thermal conductivity • Surface energy

THERMODYNAMIC PROPERTIES OF OVER 4000 COMPOUNDS

Specific heat • Enthalpy • Entropy • Free energy of formation • Vapor pressures

EQUILIBRIUM DIAGRAMS

Temperature-composition diagrams for over 1000 metal, oxide and halide systems. Consistent with diagrams from Binary Alloy Phase Diagrams and Phase Diagrams for Ceramists.

TAPP runs on either Macintosh or PC (Windows) platforms.


The price of TAPP is only \$395. Registered users may keep a copy of TAPP on both their home and office personal computers.

Take a test drive and see for yourself. Demonstration copies may be requested by telephone, FAX or letter. Please specify Macintosh or Windows version.

TAPP can be ordered directly by mail, FAX or telephone from:

E S MICROWARE
2234 Wade Court Hamilton, OH 45013
513-738-4773 513-738-4407 FAX

**ES
MICROWARE**

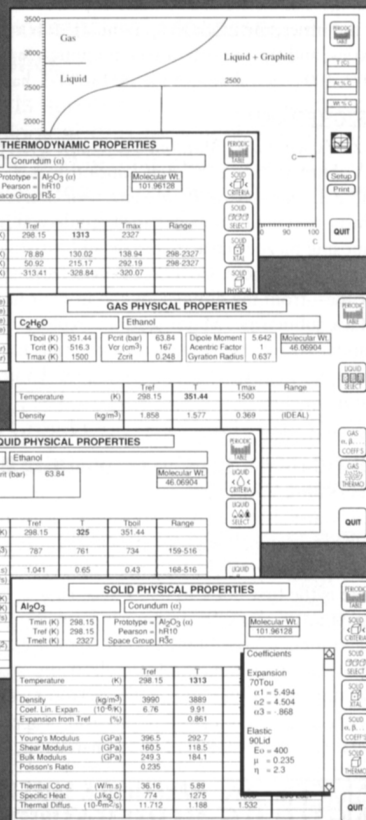

Circle No. 27 on Reader Service Card.

Ni Captures Helium Ash in Fusion Reactor

A new device that removes "ash" from a fusion "burn" could save \$100 million in the cost of a commercial fusion reactor. Invented by scientists from Argonne National Laboratory and Sandia National Laboratories, the "helium self-pumping module" could eliminate the need for large, expensive vacuum systems to remove fusion ash.

Fusion combines two hydrogen atoms to

make a single helium atom and releases energy. The fusion burn takes place in a plasma, a thin, hot gas of charged particles. The plasma is so delicate that the buildup of too much helium—the "ash"—can shut it down.


The new device takes advantage of the ability of nickel to trap helium when kept at temperatures around 500°C. Energetic helium ions from the plasma are trapped in the surface of a nickel-coated plate. As the nickel becomes saturated with helium, more nickel is vaporized from a coil heated

to about 1400°C. The vapor settles onto the plate to form a fresh nickel layer.

The module was invented by Jeffrey N. Brooks and Alan R. Krauss of Argonne and Richard E. Nygren, formerly of Argonne, now with Sandia, and has already passed tests at an experimental fusion facility in Jülich, Germany.

W.C. Sinke Receives Kistemaker Prize

The 1992 Jacob Kistemaker prize, established by the Foundation for Fundamental Research on Matter (FOM) in The Netherlands, has been awarded to W.C. Sinke, head of the R&D solar energy group within the Renewable Energies Unit of the Netherlands Energy Research Foundation. The prize honors Dutch physicists who have performed outstanding research beneficial to other sciences, technology, industry, or society in general. Recipients are awarded Dfl. 25,000, or about \$15,000.

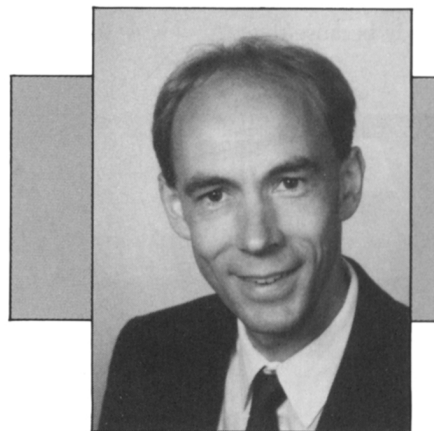

Sinke and his group performed extensive research on pulsed-laser induced explosive crystallization of amorphous silicon, which can form microcrystalline silicon or single-crystal silicon, depending on sample preparation. Sinke was also the first to prove that structural relaxation of amorphous silicon is accompanied by a substantial heat release, and characterized this process in terms of its kinetics and the role of network defects. One aspect of his work, in the field of polycrystalline silicon solar cells, concerned getting rid of impurities and passivation of crystal defects. Implementation of results yielded a considerable improvement of the efficiency of Dutch manufactured cells.

Sinke's work constitutes an essential contribution to technology and industry, and to society through the application of solar cells as a source of clean energy.

Essential Reading Material For the Materials Scientist

SUPERCONDUCTIVITY: Its Historical Roots and Development from Mercury to the Ceramic Oxides

Per Fridtjof Dahl, *Superconducting Super Collider Laboratory, Dallas*

The first truly comprehensive history of superconductivity—from the first studies in the late 19th century to the present. The book delves deeply into a largely undocumented early history, marked by H.K. Onnes's first successes with mercury in 1911 and extending to the onset of World War II. Encompasses the materials development of the fifties; the work that culminated in the BCS theory of the early sixties; and the important recent application of ceramic oxides.

1992, 400 pages, illustrated • 0-88318-797-3, hardcover, \$55.00

PIEZOELECTRICITY

C.Z. Rosen, *GEC-Marconi Electronic Systems Corp.*,
B.V. Hiremath, *AT&T Bell Laboratories*,
and R.E. Newnham, *Penn State University*

Thirty-two major review papers guide you in preparing and choosing piezoelectric materials and assist you in designing signal processing devices. Coverage ranges from the mundane to the arcane—from the dimmer switch in your home to sonar on an attack submarine. Major sections explore measurements and standards and the derivation of piezoelectric coefficients and the equations of state for coupling mechanical, electrical, and thermal fields.

1992, 512 pages • 0-88318-647-0, hardcover, \$125.00

COMPUTATIONAL METHODS IN CONDENSED MATTER: ELECTRONIC STRUCTURE

A.A. Katsnelson and V.S. Stepanyuk, *Moscow State University*,
A. Szasz, *Eotvos University, Budapest*,
and O.V. Faberovich, *Voronezh University*

Here is the first book to make accessible a large number of computational results previously known only by a few experienced practitioners. You'll find a comprehensive analysis of electron states, calculation methods for electronic structures, pseudopotential methods, and electron methods and functional theory designed to calculate physical properties.

1992, 320 pages • 0-88318-865-1, hardcover, \$75.00

AMERICAN INSTITUTE OF PHYSICS MARKETING & SALES DIVISION
335 EAST 45th STREET
NEW YORK, NY • 10017

AIP CONFERENCE PROCEEDINGS

Stay in Touch With the Important Work in Your Field

#251. SUPERCONDUCTIVITY AND ITS APPLICATIONS Proceedings of the 5th Annual Conference on Superconductivity and its Applications, Buffalo, NY, 1991

Edited by Y.H. Kao, A.E. Kaloyeros, and H.S. Kwok, *SUNY Buffalo*
1992, 750 pages
1-56396-016-8
hardcover, \$120.00

#256. SLOW DYNAMICS IN CONDENSED MATTER Proceedings of the 1st Tohwa University International Symposium on Slow Dynamics in Condensed Matter, Fukuoka, Japan, November 1991

Edited by K. Kawasaki and T. Kawakatsu, *Kyushu University*, and M. Tokuyama, *Tohwa University*.
1992, 624 pages
0-88318-938-0
hardcover, \$110.00

COME SEE US AT BOOTH 305
AT THE MRS SHOW

Circle No. 28 on Reader Service Card.

Penn State MRL Celebrates 30th Anniversary

The Materials Research Laboratory (MRL) at Pennsylvania State University recently celebrated its 30th anniversary with a symposium and a reunion of alumni. The symposium focused on successful MRL examples of "Materials Synthesis and Processing," including cement, characterization, composites, ferroics, new materials synthesis, and thin films.

A second focus was realistic planning for the future. Several speakers emphasized the radically altered research climate from 30, or even 10, years ago and the need for greater responsiveness to societal needs. For example, William Harris, assistant director for mathematical and physical sciences at the National Science Foundation (NSF), reported on a proposal at NSF to reorient some of its missions toward civilian industry support. The point was also made that universities would have to be more aggressive in serving society and industry if they wished to maintain public support.

Russell Messier, MRL director, and Rustum Roy and L.E. Cross, former directors, presented a historical perspective on the scientific and administrative achievements of the lab. MRL was the first materials lab established in the United States with no external block grant, and is now the largest MRL in the United States. In addition to leading other MRLs in its emphasis on ceramics and synthesis and characterization, it was also the founding place for the Materials Research Society. □

Correction


Bernd Stritzker's affiliation in the October MRS Bulletin, p. 15, "E-MRS Holds Elections," should have been listed as the Institute of Physics, University of Augsburg, Germany.



MATERIALS SCIENCE & ENGINEERING

announcing a new journal

C Biomimetic Materials, Sensors and Systems



New in Spring 1993

Editors

- P. Calvert**, Tucson, AZ, USA
- D. de Rossi**, Pisa, Italy
- T. Tateishi**, Tsukuba, Japan

CALL FOR PAPERS

For scientists and engineers with an interest in the respective interfaces of biology/biotechnology and materials and structures, information processes, sensors and actuators, robotics

This interdisciplinary journal reports scientific and technical contributions dealing with all methodological and technical aspects of conceiving, designing, constructing and testing man-made materials, structures, devices and systems which replicate or are inspired by naturally occurring entities, not limited to:

- Materials and Structures
- Sensors and Information Processes
- Dynamics and Control Systems

Why this journal?

Man has always learned from nature. It is only recently that scientists and engineers have started to draw on the complex architecture of biological materials for inspiration on how to improve synthetic structures. *Materials Science and Engineering C* will report on biomimetic materials, sensors and systems.



ELSEVIER
SEQUOIA

P.O. Box 564
CH-1001 Lausanne 1
Switzerland
Tel.: +41 (21) 20 73 81
Fax: +41 (21) 23 25 45

For customers in the U.S.A. and Canada:

ELSEVIER SCIENCE PUBLISHING CO., INC.
Attn.: Journal Information Center
655 Avenue of the Americas
New York, NY 10010, U.S.A.
Tel.: +1 (212) 633-3750
Fax: +1 (212) 633-3764

Please send me detailed instructions for authors on **MATERIALS SCIENCE & ENGINEERING C**

Name: _____
Company/Institute: _____
Street: _____
City: _____
Country: _____
Postal Code: _____
Date: _____ Signature: _____



MSC/mrs9211

Please visit Booth No. 302-303 at the MRS Equipment Exhibit/Table Top Display in Boston, December 1-3, 1992.

Circle No. 29 on Reader Service Card.